



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	945	RPM
Power consumption	P _e	760	W
Nominal current	I _{nom}	2.7/1.6	A
Maximum current	I _{max}	3.0/1.7	A
Cos φ		0.71	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	77	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	66	dB(A)
Weight		26.5	kg
Packing dimensions		187.8x1000x1000	mm

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa	21100 m ³ /h
50 Pa	17900 m ³ /h

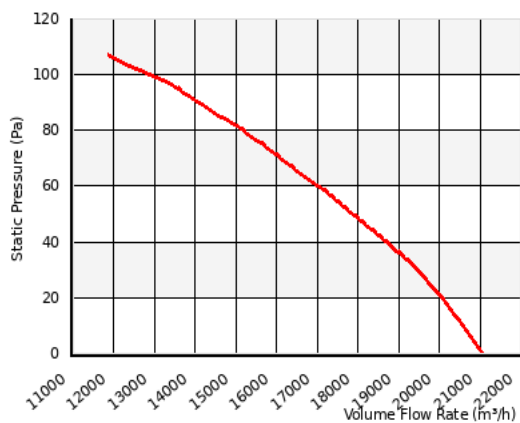


Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

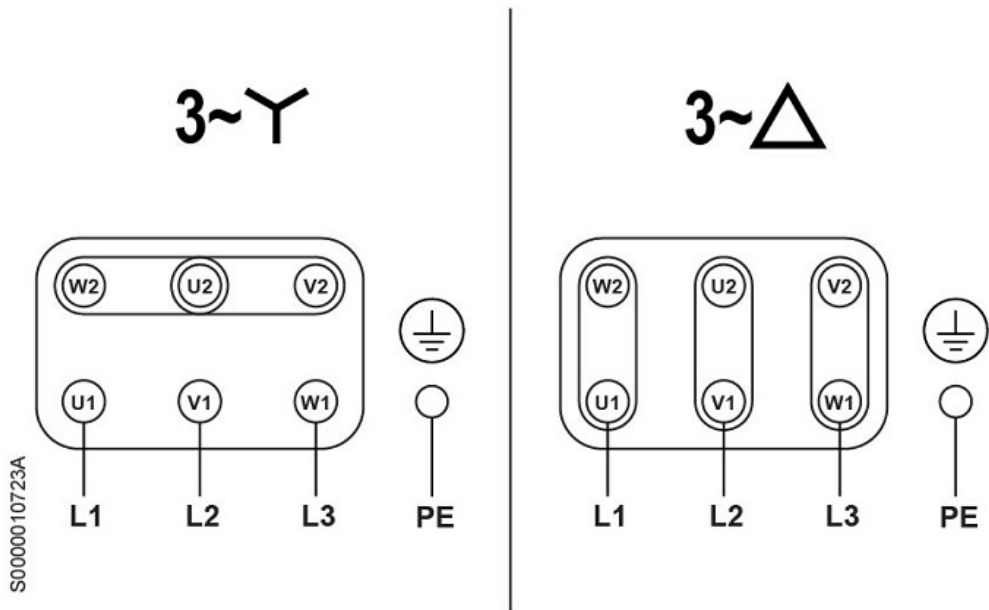

Dimensions

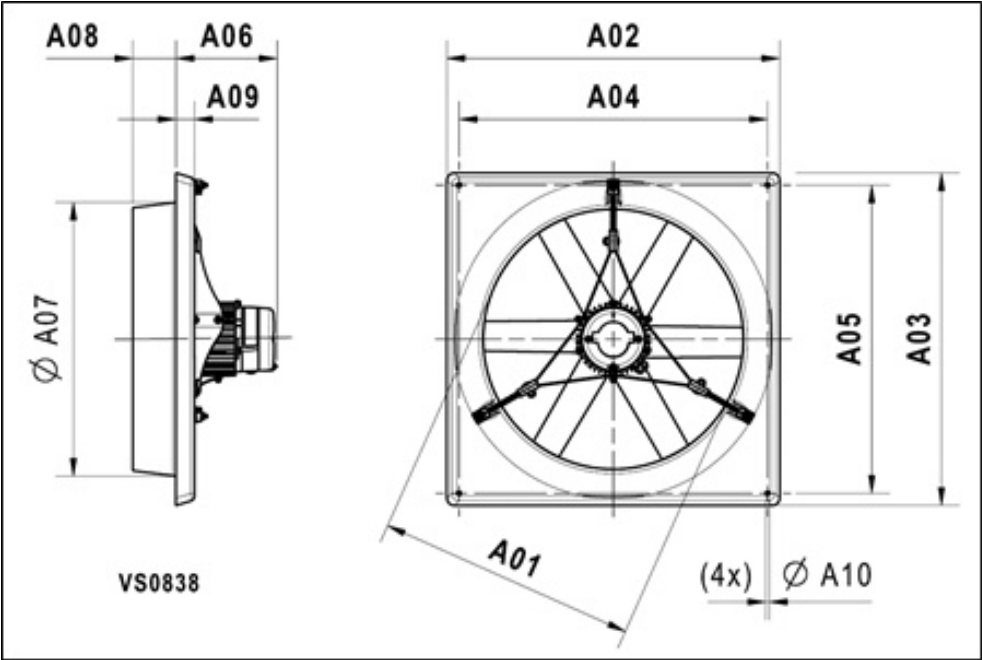

A01:	915 mm
A02:	1005 mm
A03:	1005 mm
A04:	947 mm
A05:	947 mm
A06:	247 mm
A07:	940 mm
A08:	93 mm
A09:	40 mm
A10:	10 mm

Data according to commission Regulation (EU) 327/2011

Axial fan efficiency	η_f	42%
Measurement category		A
Efficiency category		Static
Efficiency grade	N	49
VSD		Not included
Year of manufacturing		
Manufacturer		VOSTERMANS Parlevinkeweg 54 5928 NV Venlo The Netherlands 12021767
Commercial reg. no.		V6T92AAE10100
Model number		
Motor input power	Pe	0.839 kW
Volume flow	Qv	11851 m³/h
Pressure difference	psf	107 Pa
Rotational speed	n	937 rpm
Specific ratio		1.01

Data at optimum energy efficiency point

Consult instructions for information regarding installation, disassembly and recycling of this product