


Drehmoment / Torque  
 Zahnkranz / spider 92 Sh A T-PUR  
 (Zahnkranz / spider 92 Sh A)  
 $T_{KN} = 265 \text{ Nm}$   
 $T_{Kmax} = 530 \text{ Nm}$

Massenträgheitsmoment / Mass moment of inertia


$J_{ges.} = 0.003473 \text{ kgm}^2$

Schraubenanzugsmoment Teil 3- 3/8" BSW ,  $T_A = 20 \text{ Nm}$

screw tightening torque part 3- 3/8" BSW ,  $T_A = 20 \text{ Nm}$

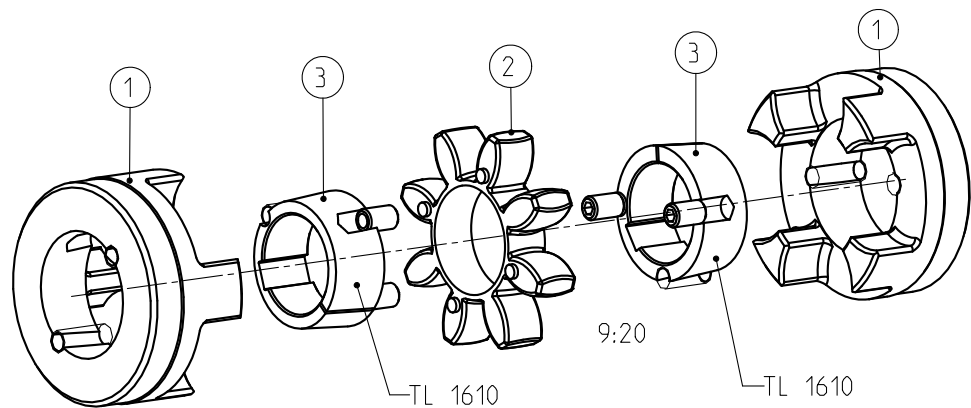

Teil 3 = Taper-Klemmbuchse 1610, Passfedernute n. DIN 6885 Bl.1 (\*Ø42H7 n. DIN 6885 Bl.3)  
 part 3 = Taper clamping bush 1610, Keyway acc. to DIN 6885 sh. 1 (\*Ø42H7 acc. to DIN 6885 sh. 3)

Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2		Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016			
Allgemeintoleranzen nach DIN ISO 2768 - mH General tolerances acc. to DIN ISO 2768-		Masstab Scale	9:10	Format DIN Size	A3
<b>ROTEX 42 TB1/1 Taper-Klemm Standard</b>				 KTR-Kupplungstechnik GmbH D-48407 Rheine	
	gezeichnet drawn	Werkstoff Material	Teilnummer Part number	Kz	Lfd.-Nr. Current number
Datum	07.02.12	DIN		M	422522
Name	SCHP	Gewicht Weight	2.499		1