


V-RING A

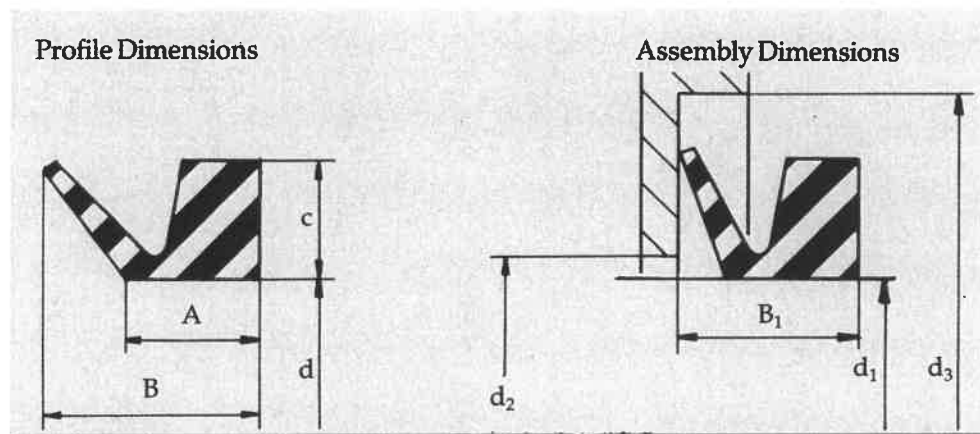

Select the larger V-ring when the dimension d_1 is on the boundary between two sizes of V-ring. All dimensions in mm.

V-ring designation	For shaft diameter d_1	Inside diameter d	Height of cross-section c	Dimension A	Free width B	Maximum d_2	Minimum d_1	Fitted width B_1
V-3A	2.7- 3.5	2.5	1.5	2.1	3.0	d_1+1	d_1+4	2.5 ± 0.3
V-4A	3.5- 4.5	3.2	2	2.4	3.7	d_1+1	d_1+6	3.0 ± 0.4
V-5A	4.5- 5.5	4						
V-6A	5.5- 6.5	5						
V-7A	6.5- 8.0	6						
V-8A	8.0- 9.5	7	2	2.4	3.7	d_1+1	d_1+6	3.0 ± 0.4
V-10A	9.5- 11.5	9	3	3.4	5.5	d_1+1	d_1+9	4.5 ± 0.6
V-12A	11.5- 12.5	10.5						
V-13A	12.5- 13.5	11.7						
V-14A	13.5- 15.5	12.5						
V-16A	15.5- 17	14						
V-18A	17.5- 19	16	3	3.4	5.5	d_1+1	d_1+9	4.5 ± 0.6
V-20A	19 - 21	18	4	4.7	7.5	d_1+2	d_1+12	6.0 ± 0.8
V-22A	21 - 24	20						
V-25A	24 - 27	22						
V-28A	27 - 29	25						
V-30A	29 - 31	27						
V-32A	31 - 33	29						
V-35A	33 - 36	31						
V-38A	36 - 38	34	4	4.7	7.5	d_1+2	d_1+12	6.0 ± 0.8
V-40A	38 - 43	36	5	5.5	9.0	d_1+2	d_1+15	7.0 ± 1.0
V-45A	43 - 48	40						
V-50A	48 - 53	45						
V-55A	53 - 58	49						
V-60A	58 - 63	54						
V-65A	63 - 68	58	5	5.5	9.0	d_1+2	d_1+15	7.0 ± 1.0
V-70A	68 - 73	63	6	6.8	11.0	d_1+3	d_1+18	9.0 ± 1.2
V-75A	73 - 78	67						
V-80A	78 - 83	72						
V-85A	83 - 88	76						
V-90A	88 - 93	81						
V-95A	93 - 98	85						
V-100A	98 - 105	90	6	6.8	11.0	d_1+3	d_1+18	9.0 ± 1.2
V-110A	105 - 115	99	7	7.9	12.8	d_1+4	d_1+21	10.5 ± 1.5
V-120A	115 - 125	108						
V-130A	125 - 135	117						
V-140A	135 - 145	126						
V-150A	145 - 155	135	7	7.9	12.8	d_1+4	d_1+21	10.5 ± 1.5
V-160A	155 - 165	144	8	9.0	14.5	d_1+4	d_1+24	12.0 ± 1.8
V-170A	165 - 175	153						
V-180A	175 - 185	162						
V-190A	185 - 195	171						
V-199A	195 - 210	180	8	9.0	14.5	d_1+4	d_1+24	12.5 ± 1.8